

BNG


系列防爆挠性连接管(II C)



适用范围 Application

- 适用于1区、2区危险场所。
- 适用于II A、II B、II C类爆炸性气体环境。
- Can be used in hazardous areas: Zone 1 and Zone 2.
- Can be used in explosive gas atmospheres of Category IIA、IIB and IIC.

型号含义 Model implication

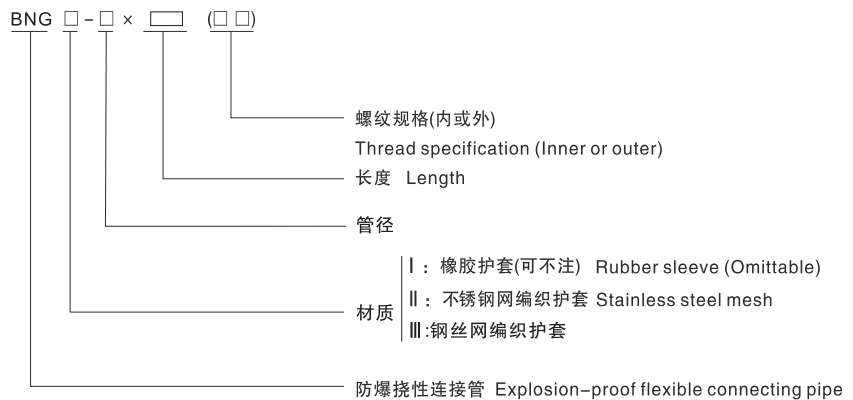

产品特点 Features

- 具有阻燃、耐腐蚀、耐水、耐老化、挠性良好、结构牢固、工作可靠等特点；
- 挠性管长度、螺纹尺寸规格可根据用户要求特殊加工，如NPT螺纹、英制以及公制螺纹等各种非标螺纹。
- Flame-with stand, corrosin-proof, waterproof, anti-aging, good fiexibility, rigid structure, safety and security.
- The length, thread size can be specially designed, such as thread NPT, metric thread etc.

主要技术参数 Main technical parameters

- 执行标准：GB 3836.1、GB 3836.2、IEC60079
- 防爆标志：Exd II C Gb
- Implementing the standard : GB 3836.1、GB 3836.2、IEC60079
- Ex-mark: Exd II C Gb

BNG

Type explosion-proof flexible connecting pipe (IIc)

型号 Type	管通径(mm) Inward diameter	接头管螺纹(G") Connecting thread	长度 (mm) Length	最小弯曲半径 (mm) Min bend radius
BNG-□15×700	15	1/2	700	80
BNG-□15×1000	15	1/2	1000	80
BNG-□20×700	20	3/4	700	110
BNG-□20×1000	20	3/4	1000	110
BNG-□25×700	25	1	700	145
BNG-□25×1000	25	1	1000	145
BNG-□32×700	32	1 1/4	700	180
BNG-□32×1000	32	1 1/4	1000	180
BNG-□40×700	40	1 1/2	700	210
BNG-□40×1000	40	1 1/2	1000	210
BNG-□50×700	50	2	700	250
BNG-□50×1000	50	2	1000	250
BNG-□70×700	70	2 1/2	700	350
BNG-□70×1000	70	2 1/2	1000	350
BNG-□80×700	80	3	700	400
BNG-□80×1000	80	3	1000	400
BNG-□100×700	100	4	700	500
BNG-□100×1000	100	4	1000	500

订货须知 Notice if ordering

■ 标注螺纹规格时应注明内外螺纹，如BNG-1000×G3/4"(内)/G1"(外)Exd II，即长度为1000mm，一端为G3/4内螺纹，另一端为G1外螺纹的不锈钢挠性连接管。

■ Please note inner and outer thread specification when noting the thread. For example: eNG-1000×G3/4" (inner)/G1" (outer) Exd II means: it's length is 700, one terminal is inner thread G3/4", another terminal is outer thread G1", rubber sleeve flexible connecting pipe.

■ 若需订购防爆挠性连接管，材质为不锈钢，管径为G15，长度为1000mm。一端为G15内，一端为G15外。则订货型号为" BNG-II-15×1000-B